




The world's favorite lock

HSA6000 series

Wirefree Yale HSA6060 Remote keyfob controller

(Yale part number: 666060001001)

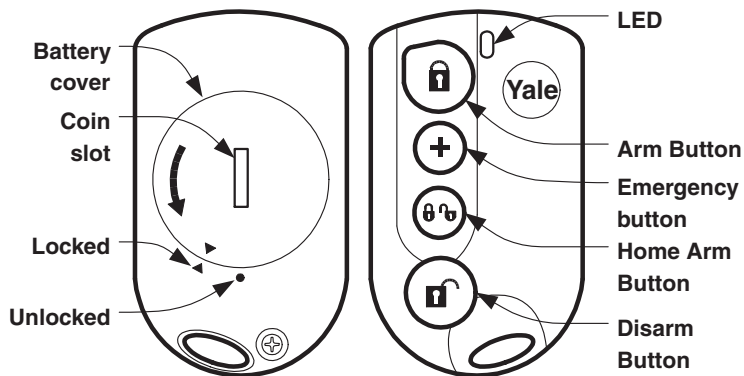

Pack contents

- 1 x HSA6060 Remote Keyfob controller.
- 1 x 3V C2032 cell.

Keyfob description

LED: Red LED indicates keyfob state.

Arm button: Press for Away Arming.

Emergency button: Press for Personal alarm.

Home Arm button: Press to partially arm.

Disarm: Press to switch alarm off or to silence alarm.

Specification

Conforms to:

- EN 300 220-1 / V2.1.1 (2006-04)
- EN 301 489 -1, / V1.6.1 (2004-12)
- EN 301 489-3, / V 1.4.1 (2002-08)

Environmental conditions:

-10°C to 40°C, relative humidity
70% non-condensing

Radio: Microcontroller controlled
433.92MHz AM transmitter.

Battery: 3V, CR2032 lithium
coin cell. 3 years typical domestic
service life

Battery installation

1 Remove the battery cover by using a coin to turn counter-clockwise until the arrow is pointing to the round dot (unlocked).

2 Insert the battery with the positive (+) side up.

3 To replace the battery cover ensure the arrow is pointing towards the dot and turn the cover clockwise until the arrows are pointing towards each other (locked).

Programming & testing

Program your Keyfob before installation and test afterwards. Please see your current system instruction book.



Yale UK

School Street, Willenhall
West Midlands WV13 3PW

Tel +44 (0)1902 364647

Fax +44 (0)1902 364692

E-mail info@yale.co.uk

www.yale.co.uk



NoPb

